

## DataSheet


# MT-E715

8 AI,  $\pm 10$  V, 24 Bit, 102.4 kS/s/ch Simultaneous

This document contains the specifications for MT-E715. Specifications are typical at 25°C unless otherwise noted.



**Caution** Using the MT-E715 in a manner not described in this document may impair the protection the MT-E715 provides.

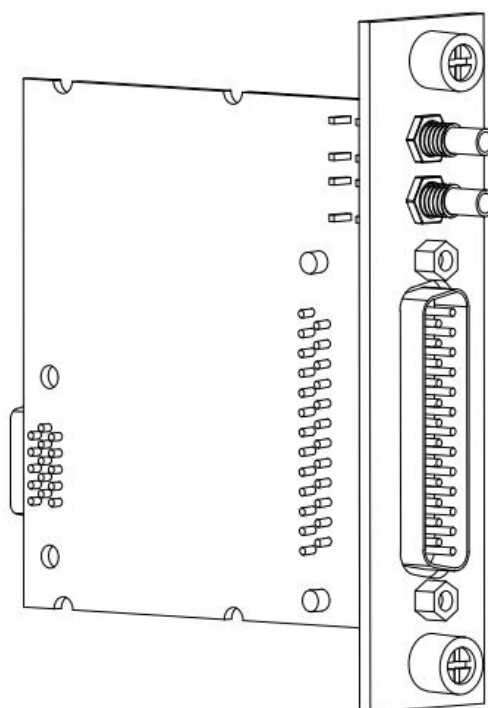

# MT E Series Overview

---



MT provides more than 20 E Series modules for measurement, control, and communication applications. E Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of E Series modules are supported in both RobustRIO and FlexDAQ platforms and you can move modules from one platform to the other with no modification.

## RobustRIO



RobustRIO combines an open-embedded architecture with small size, extreme ruggedness, and E Series modules in a platform powered by the Redefinable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.

## FlexDAQ


FlexDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using FlexDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.



# Software


## LabVIEW Professional Development System for Windows

- Use advanced software tools for large project development
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers




## LabVIEW FPGA Module

- Design FPGA applications for MT RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions




## LabVIEW Real-Time Module


- Design deterministic real-time applications with LabVIEW graphical programming
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support



# MT-E715 Connectivity

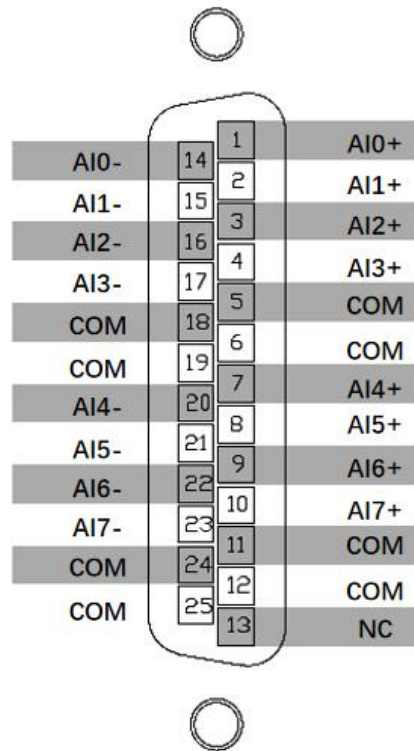

# MT-E715 Circuitry

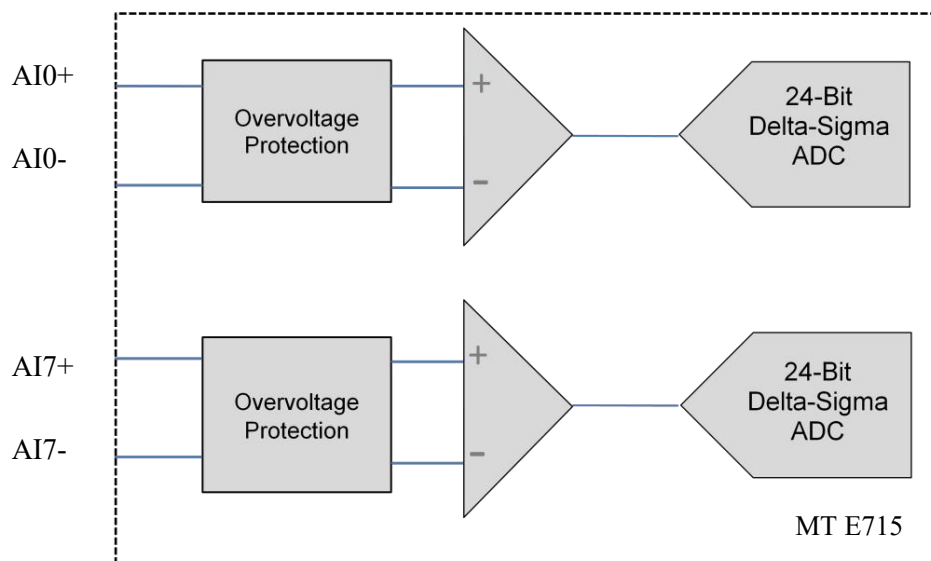

The input signal on each channel is buffered, conditioned, and then sampled by a 24-bit Delta-Sigma ADC.

# Clock Source

You can select clock source supply to the Delta- Sigma ADC on E715. And there are two SMB interface which can be used to export a clock or receive a clock. The two SMB interface are connected internally.

## MT E715 ADC Clock Configuration

Clock Source	Dial Switch	
	S1	S2
Internal clock	ON	OFF
External clock (from SMB)	OFF	ON
Internal clock, and export internal clock to SMB	ON	ON

### Example: ADC clock from internal clock



# MT-E715 Specifications

---

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.



**Caution** To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



**Caution** Do not operate the MT-E715 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to MangoTree for repair.

## Input Characteristics

---



Number of channels	8 analog input channels
ADC resolution	24 bits
Type of ADC	Delta-Sigma (with analog prefiltering)
Sampling mode	Simultaneous
Internal master timebase( $f_M$ )	26.2144MHz
Data rate range( $f_s$ )	
Minimum	3.303 kS/s
Maximum	102.4 kS/s
Data rates ( $f_s$ )	$(f_M \div 256)/n, n= 1,2,\dots,31$
Input coupling	AC/DC(hardware-selectable)
AC cutoff frequency	
-3dB	0.1Hz
Input range	$\pm 5V$
AC voltage full-scale range	
Minimum	$\pm 5V_{pk}$
Typical	$\pm 5.05V_{pk}$
Maximum	$\pm 5.15V_{pk}$
IEPE excitation current	
Minimum	2.0 mA
Typical	2.1 mA

IEPE compliance voltage	24V maximum
Overvoltage protection	±30V
Crosstalk(1 kHz)	-107dB
Passband	
Frequency	0.453 * $f_s$
Flatness( $f_s = 102.4\text{kS/s}$ )	39m dB (pk-to-pk maximum)
Stopband	
Frequency	0.547 * $f_s$
Rejection	105dB
Alias-free bandwidth	0.453 * $f_s$
Oversample rate	64 * $f_s$
CMRR	
Minimum	90dB
Typical	108dB
Differential input impedance	14k $\Omega$
No missing codes	24Bits
Noise(shorted input)	8.5uVrms
Signal-to-noise ratio(SNR)	106dB
Total harmonic distortion(THD)	-108dB
Spurious-free dynamic range	109dB

Table 1. Accuracy

Measurement Conditions		Percent of Reading (Gain Error)	Percent of Range (Offset Error)
Calibrated	Maximum (-40 °C to 70 °C)	0.034%	±0.014%
	Typical (25 °C ±5 °C)	0.007%	±0.005%

AC Coupling, Input 1kHz sine wave, Power Spectrum and THD:

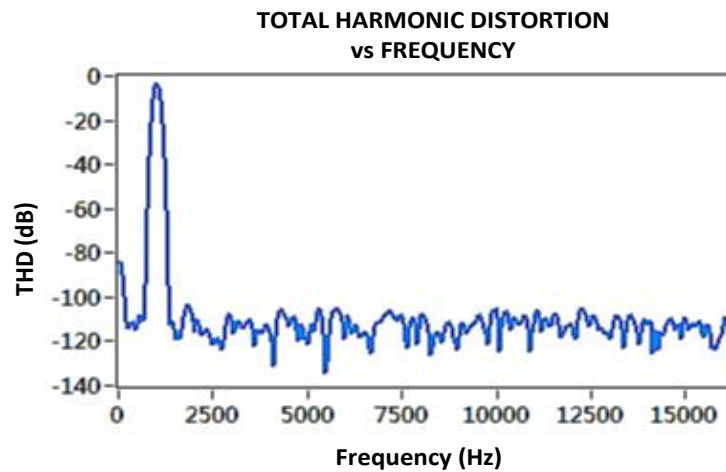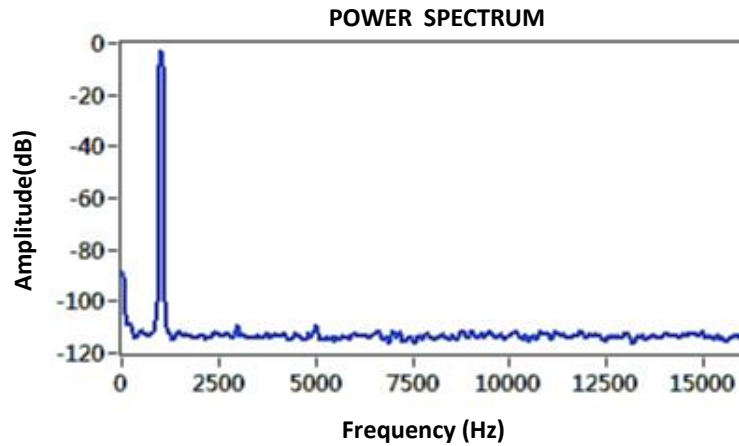

## Power Requirements

---

Power consumption from chassis: 900mW maximum

---

Thermal dissipation (at 70 °C) 930mW maximum

---

## Safety Voltages

Connect only voltages that are within the following limits:

---

Channel-to-earth ground  $\pm 30$  V maximum, Measurement Category I

---

Isolation

---



Channel-to-channel	None
Channel-to-earth ground	None

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

## Shock and Vibration

To meet these specifications, you must panel mount the system.

### Operating vibration

Random (IEC 60068-2-64)	5 g <sub>rms</sub> , 10 Hz to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature	-40 °C to 70 °C (IEC 60068-2-1, IEC 60068-2-2)
Storage temperature	-40 °C to 85 °C

(IEC 60068-2-1, IEC 60068-2-2)

Ingress protection	IP40
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing Storage
humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing Pollution
Degree	2
Maximum altitude	500m

Indoor use only.

# Support

MT-RIO上手指南:

<http://server.mangotree.cn:9000/WebFile/Downloads/上手指南/MT-RIO/>



RIO上手指南

MT-RIO视频教程:

<http://server.mangotree.cn:9000/WebFile/Downloads/视频教程/MT-RIO/>



RIO视频教程

MT-Master上手指南:

<http://server.mangotree.cn:9000/WebFile/Downloads/上手指南/MT-Master/>



Master上手指南

MT-Master视频教程:

<http://server.mangotree.cn:9000/WebFile/Downloads/视频教程/MT-Master/>



Master视频教程

# Dimensions:(mm)

