

DataSheet


MT-X330

GPS and BeiDou Synchronization Timing Module

This document contains the specifications for MT-X330. Specifications are typical at 25°C unless otherwise noted.



Caution Using the MT-X330 in a manner not described in this document may impair the protection the MT-X330 provides.

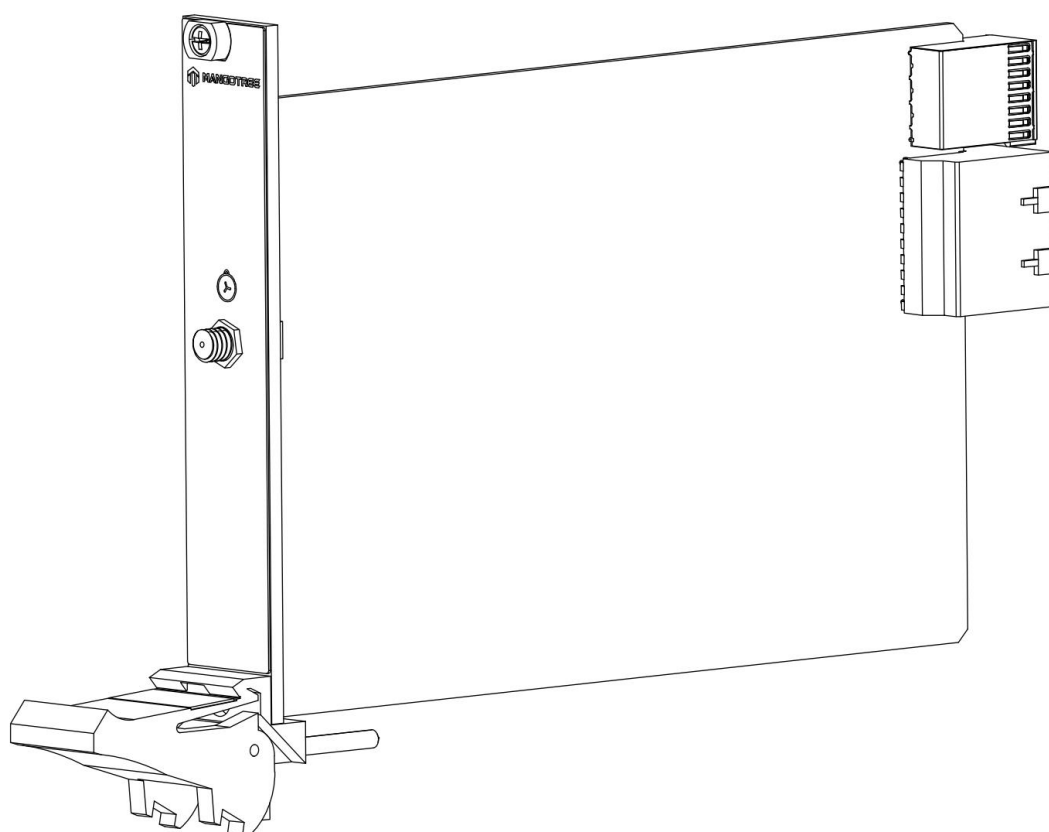

Connecting the MT-X330

The MT-X330 has one SMA female connector on its front panel for a GPS active antenna. The connector provides a DC voltage to power the antenna and also serves as input for the GPS RF signal.

Installing the Antenna

The embedded GPS receiver in the MT-X330 requires signals from several satellites to compute accurate timing and location. The more satellites available to the receiver, the more accurately it can determine time and location. Therefore, the antenna location should be such that it receives signals from the greatest number of satellites possible. As the number of satellites visible to the antenna decreases, the synchronization performance may also decrease. Choose the antenna location so that the antenna has a clear view of the sky. There is no strict definition for a clear view of the sky, but a suitable guideline is that the GPS antenna should have a straight line of sight to the sky in all directions (360°) down to an imaginary line making a 30° angle with the ground. Locations far from trees and tall buildings that could block or reflect GPS satellite signals are best.

Maximum Cable Length

Maximum cable length depends on the GPS antenna gain and the Cable's loss per unit of distance. We recommend a GPS signal strength of between -135 dBm and -120 dBm at the MT-X330 SMA input. GPS signal strength on the Earth's surface is typically -130 dBm. Targeting a signal strength of -125 dBm at the SMA input, you can compute the maximum cable length as:

$$\text{Max_cable_loss} = -130 \text{ dBm} + \text{antenna_gain} - (-125 \text{ dBm})$$

$$\text{Max_cable_length} = \text{Max_cable_loss} /$$
$$(\text{loss_per_unit_of_distance})$$

For example, if you use an active antenna with gain of 28 dB and RG-58 cable, which has a rated loss at 1.5 GHz of about 0.8 dB/m (24.5 dB/100 ft), the maximum cable length you could use is:

$$\text{Max_cable_loss} = -130 \text{ dBm} + 28 \text{ dB} - (-125 \text{ dBm}) = 23 \text{ dB}$$

$$\text{Max_cable_length} = 23 \text{ dB} / (0.8 \text{ dB/m}) \approx 29 \text{ m}$$

Characteristics

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

Signal type	GPS L1 C/A BeiDou B1 C/A
GPS signal frequency	1575.42±1.023MHz
BeiDou signal frequency	1561.098±2.046MHz
Update Rate	1Hz by default, maximally up to 10Hz
Low Consumption	24.1 mA in tracking mode
Sensitivity	
Acquisition	-148dBm
Reacquisition	-163dBm
Tracking	-165dBm
Recommended signal strength at SMA	-135 dBm to -120 dBm
Input impedance	50Ω, nominal
Accuracy of 1PPS Signal	Typical accuracy < 10 ns
Passive Antenna	
Frequency Range: 1559MHz-1609 MHz	
VSWR: <2 (Typ.)	
Polarization: RHCP or Linear	
Gain: >0dBi	
Active Antenna	
Frequency Range: 1559MHz-1609 MHz	
VSWR: <2 (Typ.)	
Polarization: RHCP or Linear	
Noise figure: <1.5dB	
Gain (antenna): >0 dBi	
Gain (embedded LNA): <17dB (Typ.)	

Power Requirements

Power consumption from chassis	150 mW max
Thermal dissipation (at 70 °C)	550 mW max

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Shock and Vibration

To meet these specifications, you must panel mount the system.

Operating vibration

Random (IEC 60068-2-64)	5 g _{rms} , 10 Hz to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature	-40 °C to 70 °C (IEC 60068-2-1, IEC 60068-2-2)
Storage temperature	-40 °C to 85 °C (IEC 60068-2-1, IEC 60068-2-2)
Ingress protection	IP40
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing Storage
humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing Pollution
Degree	2
Maximum altitude	5,000 m

Indoor use only.

Config文本

MT-DAQ设备的开发和使用依赖于Config配置文本，只有正确配置该文本，才能保证设备的正常运行。不同型号的设备或板卡对应的配置参数是不同的。Python、LabVIEW和C#三种编程语言的Config配置文本完全相同。

通用Config配置文本通过MT-Master软件主页导出获得，用户可以根据实际设备或板卡的参数对配置文本进行修改配置，或者按照文本默认参数配置运行。

Config配置文本中的各项参数含义及其具体配置可以参考MT-DAQ上手指南，指南链接附于下文Support板块。

使用MT产品过程中如有任何疑问，可以通过访问官网：<http://www.mangotree.cn>联系专业客服咨询。



MangoTree官网

Support

MT-Master上手指南:

<https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-Master/>



Master上手指南

MT-Master视频教程:

<https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-Master/>



Master视频教程

MT-DAQ上手指南:

<https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-DAQ/>



DAQ上手指南

MT-DAQ视频教程:

<https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-DAQ/>



DAQ视频教程

Dimensions:(mm)

