

## DataSheet


# MT-X754

Matrix module, 2-wire, 4×24, 250VAC/220VDC, 2A

This document contains the specifications for MT-X754. Specifications are typical at 25°C unless otherwise noted.




**Caution** Using the MT-X754 in a manner not described in this document may impair the protection the MT-X754 provides.

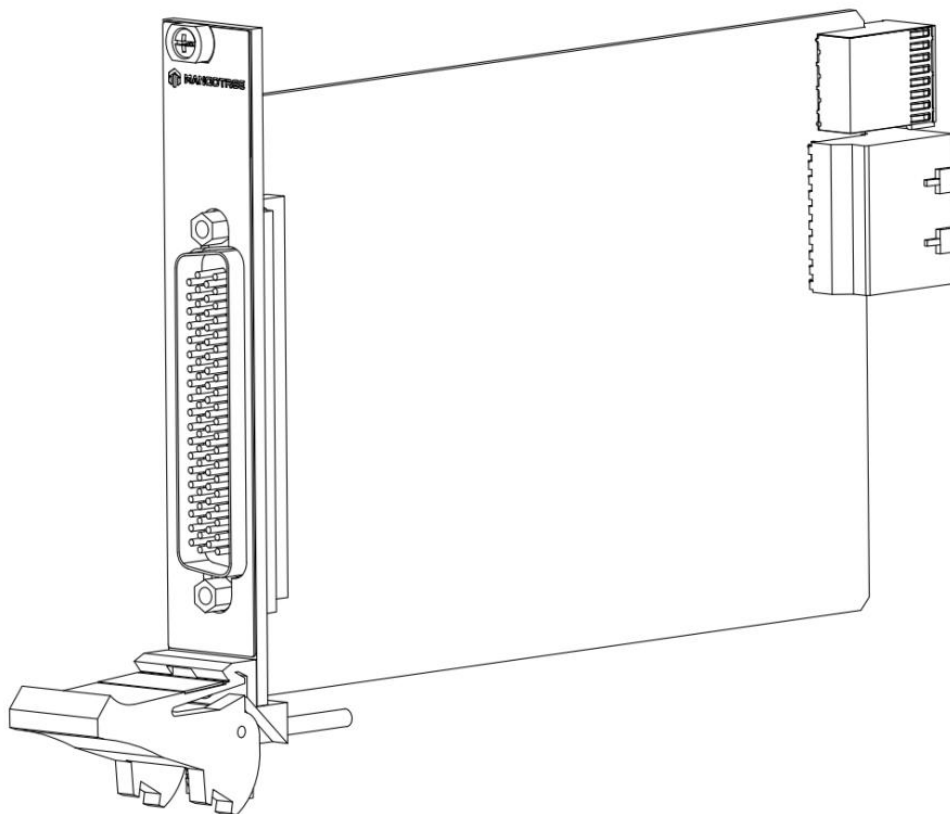


# MT-X754 Connectivity

Pin definition of DSUB connector.

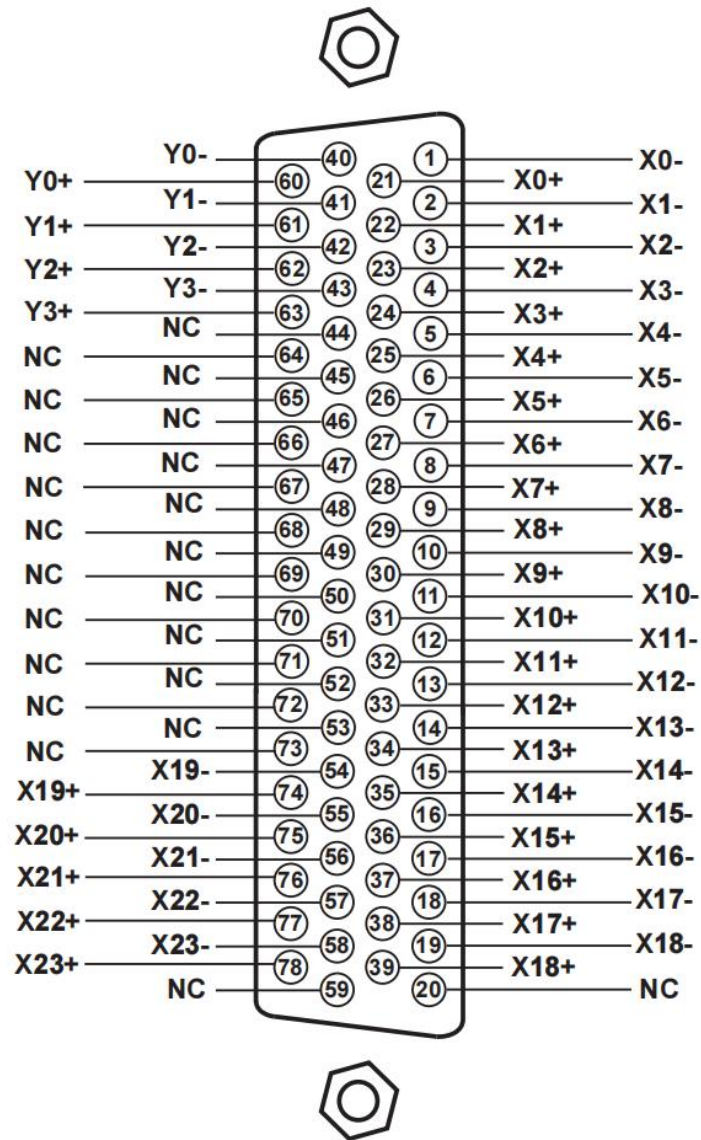

## Hardware Diagram

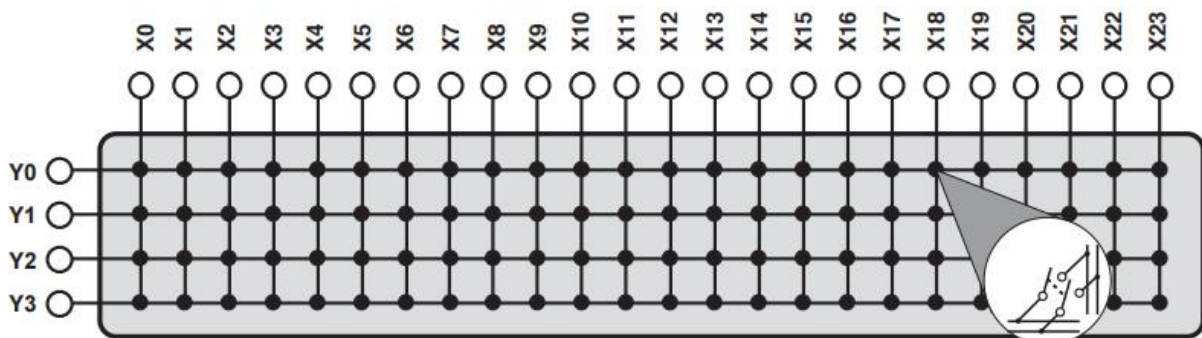

<b>NO.</b>	<b>Signal Path</b>	<b>Relay Number</b>	<b>NO.</b>	<b>Signal Path</b>	<b>Relay Number</b>
1	Y0+ to X0+ and Y0- to X0-	K0	49	Y2+ to X0+ and Y2- to X0-	K48
2	Y0+ to X1+ and Y0- to X1-	K1	50	Y2+ to X1+ and Y2- to X1-	K49
3	Y0+ to X2+ and Y0- to X2-	K2	51	Y2+ to X2+ and Y2- to X2-	K50
4	Y0+ to X3+ and Y0- to X3-	K3	52	Y2+ to X3+ and Y2- to X3-	K51
5	Y0+ to X4+ and Y0- to X4-	K4	53	Y2+ to X4+ and Y2- to X4-	K52
6	Y0+ to X5+ and Y0- to X5-	K5	54	Y2+ to X5+ and Y2- to X5-	K53
7	Y0+ to X6+ and Y0- to X6-	K6	55	Y2+ to X6+ and Y2- to X6-	K54
8	Y0+ to X7+ and Y0- to X7-	K7	56	Y2+ to X7+ and Y2- to X7-	K55
9	Y0+ to X8+ and Y0- to X8-	K8	57	Y2+ to X8+ and Y2- to X8-	K56
10	Y0+ to X9+ and Y0- to X9-	K9	58	Y2+ to X9+ and Y2- to X9-	K57
11	Y0+ to X10+ and Y0- to X10-	K10	59	Y2+ to X10+ and Y2- to X10-	K58
12	Y0+ to X11+ and Y0- to X11-	K11	60	Y2+ to X11+ and Y2- to X11-	K59
13	Y0+ to X12+ and Y0- to X12-	K12	61	Y2+ to X12+ and Y2- to X12-	K60
14	Y0+ to X13+ and Y0- to X13-	K13	62	Y2+ to X13+ and Y2- to X13-	K61
15	Y0+ to X14+ and Y0- to X14-	K14	63	Y2+ to X14+ and Y2- to X14-	K62
16	Y0+ to X15+ and Y0- to X15-	K15	64	Y2+ to X15+ and Y2- to X15-	K63
17	Y0+ to X16+ and Y0- to X16-	K16	65	Y2+ to X16+ and Y2- to X16-	K64
18	Y0+ to X17+ and Y0- to X17-	K17	66	Y2+ to X17+ and Y2- to X17-	K65
19	Y0+ to X18+ and Y0- to X18-	K18	67	Y2+ to X18+ and Y2- to X18-	K66
20	Y0+ to X19+ and Y0- to X19-	K19	68	Y2+ to X19+ and Y2- to X19-	K67
21	Y0+ to X20+ and Y0- to X20-	K20	69	Y2+ to X20+ and Y2- to X20-	K68
22	Y0+ to X21+ and Y0- to X21-	K21	70	Y2+ to X21+ and Y2- to X21-	K69
23	Y0+ to X22+ and Y0- to X22-	K22	71	Y2+ to X22+ and Y2- to X22-	K70
24	Y0+ to X23+ and Y0- to X23-	K23	72	Y2+ to X23+ and Y2- to X23-	K71
25	Y1+ to X0+ and Y1- to X0-	K24	73	Y3+ to X0+ and Y3- to X0-	K72
26	Y1+ to X1+ and Y1- to X1-	K25	74	Y3+ to X1+ and Y3- to X1-	K73
27	Y1+ to X2+ and Y1- to X2-	K26	75	Y3+ to X2+ and Y3- to X2-	K74
28	Y1+ to X3+ and Y1- to X3-	K27	76	Y3+ to X3+ and Y3- to X3-	K75
29	Y1+ to X4+ and Y1- to X4-	K28	77	Y3+ to X4+ and Y3- to X4-	K76
30	Y1+ to X5+ and Y1- to X5-	K29	78	Y3+ to X5+ and Y3- to X5-	K77
31	Y1+ to X6+ and Y1- to X6-	K30	79	Y3+ to X6+ and Y3- to X6-	K78
32	Y1+ to X7+ and Y1- to X7-	K31	80	Y3+ to X7+ and Y3- to X7-	K79
33	Y1+ to X8+ and Y1- to X8-	K32	81	Y3+ to X8+ and Y3- to X8-	K80
34	Y1+ to X9+ and Y1- to X9-	K33	82	Y3+ to X9+ and Y3- to X9-	K81
35	Y1+ to X10+ and Y1- to X10-	K34	83	Y3+ to X10+ and Y3- to X10-	K82
36	Y1+ to X11+ and Y1- to X11-	K35	84	Y3+ to X11+ and Y3- to X11-	K83
37	Y1+ to X12+ and Y1- to X12-	K36	85	Y3+ to X12+ and Y3- to X12-	K84
38	Y1+ to X13+ and Y1- to X13-	K37	86	Y3+ to X13+ and Y3- to X13-	K85
39	Y1+ to X14+ and Y1- to X14-	K38	87	Y3+ to X14+ and Y3- to X14-	K86
40	Y1+ to X15+ and Y1- to X15-	K39	88	Y3+ to X15+ and Y3- to X15-	K87
41	Y1+ to X16+ and Y1- to X16-	K40	89	Y3+ to X16+ and Y3- to X16-	K88

42	Y1+ to X17+ and Y1- to X17-	K41	90	Y3+ to X17+ and Y3- to X17-	K89
43	Y1+ to X18+ and Y1- to X18-	K42	91	Y3+ to X18+ and Y3- to X18-	K90
44	Y1+ to X19+ and Y1- to X19-	K43	92	Y3+ to X19+ and Y3- to X19-	K91
45	Y1+ to X20+ and Y1- to X20-	K44	93	Y3+ to X20+ and Y3- to X20-	K92
46	Y1+ to X21+ and Y1- to X21-	K45	94	Y3+ to X21+ and Y3- to X21-	K93
47	Y1+ to X22+ and Y1- to X22-	K46	95	Y3+ to X22+ and Y3- to X22-	K94
48	Y1+ to X23+ and Y1- to X23-	K47	96	Y3+ to X23+ and Y3- to X23-	K95

## MT-X754 Specifications

Specifications are valid at 23 °C unless otherwise noted.

### Input Characteristics

Topology	2-wire, 4 × 24 matrix
Maximum switching voltage	220V DC, 250V AC
Maximum switching power (per channel)	
AC	62.5 VA
DC (30 V to 220 V)	60 W
Maximum current (per channel)	2 A
DC path resistance	
Initial	<0.8 Ω
End-of-life	≥1.8 Ω
Relay operate time	
Typical	3 ms
Maximum	6 ms

### Safety Voltages

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1

# CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

## Shock and Vibration

To meet these specifications, you must panel mount the system.

---

### Random vibration

---

Operating (IEC 60068-2-64)	0.3 <sub>rms</sub> , 5 Hz to 500 Hz
Nonoperating (IEC 60068-2-6)	2.4 <sub>rms</sub> , 5 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine;

---

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature	0 °C to 55 °C
Storage temperature	-20°C to 70 °C
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing
Storage humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing Pollution
Degree	2
Maximum altitude	2,000 m

---

# Config文本

MT-DAQ设备的开发和使用依赖于Config配置文本，只有正确配置该文本，才能保证设备的正常运行。不同型号的设备或板卡对应的配置参数是不同的。Python、LabVIEW和C#三种编程语言的Config配置文本完全相同。

通用Config配置文本通过MT-Master软件主页导出获得，用户可以根据实际设备或板卡的参数对配置文本进行修改配置，或者按照文本默认参数配置运行。

Config配置文本中的各项参数含义及其具体配置可以参考MT-DAQ上手指南，指南链接附于下文Support板块。

使用MT产品过程中如有任何疑问，可以通过访问官网：<http://www.mangotree.cn>联系专业客服咨询。



MangoTree官网

# Support

MT-Master上手指南:

<http://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-Master/>



Master上手指南

MT-Master视频教程:

<http://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-Master/>



Master视频教程

MT-DAQ上手指南:

<http://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-DAQ/>



DAQ上手指南

MT-DAQ视频教程:

<http://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-DAQ/>



DAQ视频教程

