DataSheet

MT-E782

32-Channels(Sourcing Output), 8us

This document contains the specifications for MT-E782.Specifications are typical at 25°C unless otherwise noted.

Caution Using the MT-E782 in a manner not described in this document may impair the protection the MT-E782 provides.

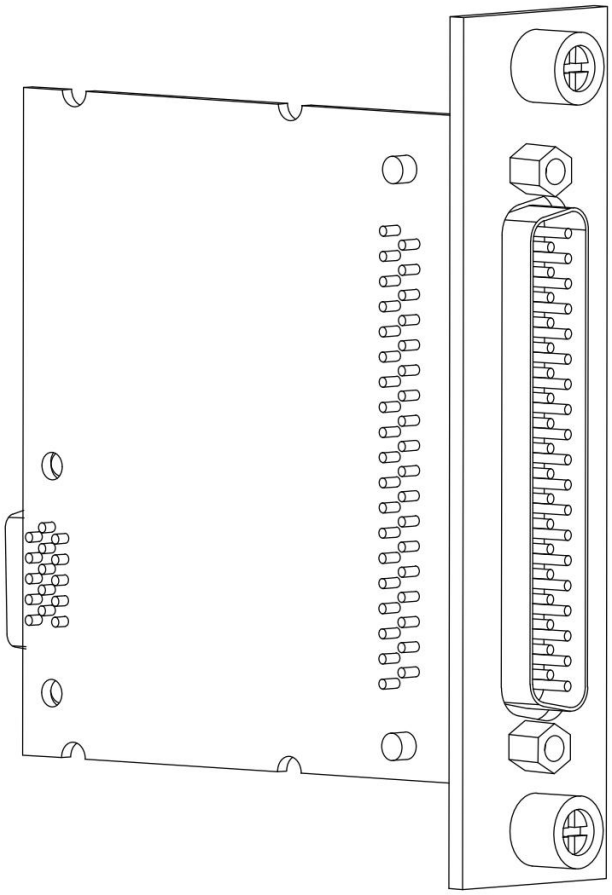

MANGOTREE

MT-E782 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

All voltages are relative to COM unless otherwise noted.

Output Characteristics

Output type	Sourcing
External power supply voltage range(Vsup)	12 V DC to 40V DC
Continuous output current(I), per channel	1 A maximum
Output impedance(R)	0.07Ω maximum
Output voltage(V)	Vsup – (I*R)
Reversed-voltage protection	None
I/O protection voltage	30 VDC maximum
Maximum update rate	7 us maximum
Propagation delay	1us maximum

Support

MT-Master上手指南：

https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-Master/

Master上手指南

MT-Master视频教程：

https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-Master/

Master视频教程

MT-RIO上手指南：

https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-RIO/

RIO上手指南

MT-RIO视频教程：

https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-RIO/

RIO视频教程
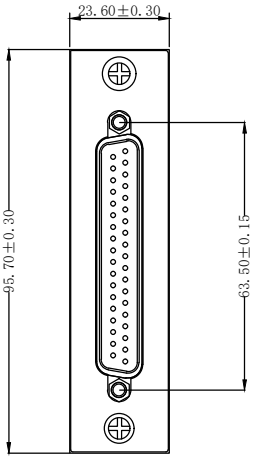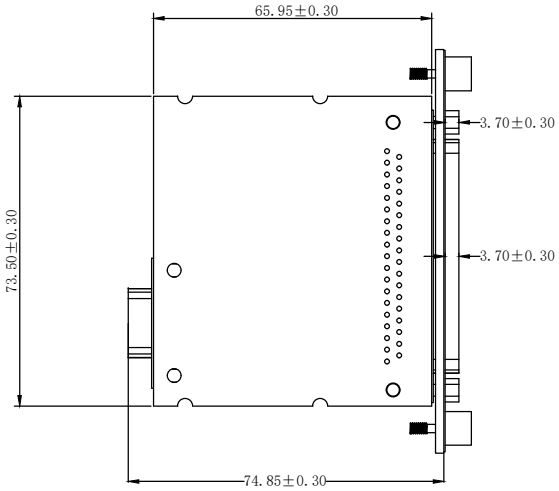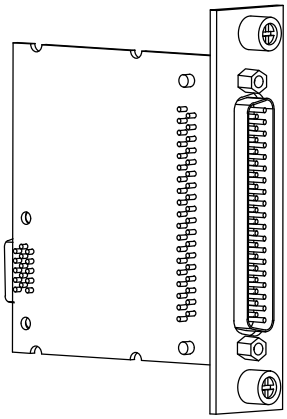
Dimensions:(mm)