

DataSheet


MT-E785

Relay module, SPST(NO), 8 channel, 250VAC/220VDC, 2 A

This document contains the specifications for MT-E785. Specifications are typical at 25°C unless otherwise noted.




Caution Using the MT-E785 in a manner not described in this document may impair the protection the MT-E785 provides.

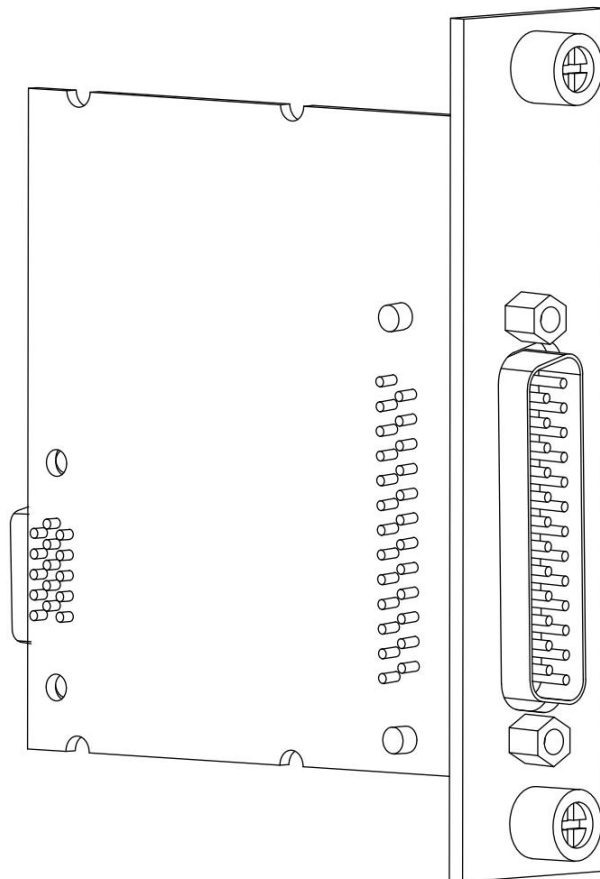

MANGOTREE

MT-E785 Connectivity

Pin definition of DSUB connector and Spring Terminal connector.

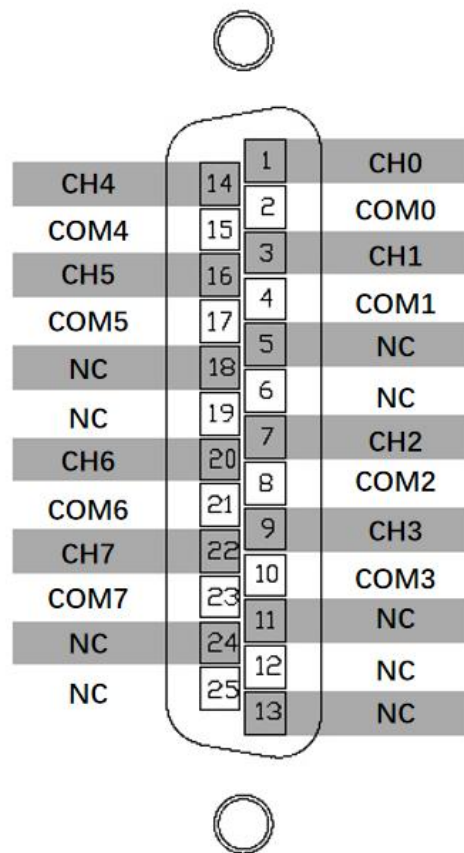

Output Circuitry



.

.

.



MT-E785 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

All voltages are relative to COM unless otherwise noted.

Output Characteristics

Number of channels	8
Topology	SPST(normal open)
Maximum switching voltage	250 VAC/220 VDC
Maximum switching power(per channel)	
AC	62.5 VA
DC(30V to 220V)	60 W
Maximum current(per channel)	2A

Support

MT-RIO上手指南:

<https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-RIO/>



RIO上手指南

MT-RIO视频教程:

<https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-RIO/>



RIO视频教程

MT-Master上手指南:

<https://server.mangotree.cn:9900/WebFile/Downloads/上手指南/MT-Master/>



Master上手指南

MT-Master视频教程:

<https://server.mangotree.cn:9900/WebFile/Downloads/视频教程/MT-Master/>



Master视频教程

Dimensions:(mm)

