

## DataSheet


# MT E791S

## 4-Port, RS232 Serial Module

This document contains the specifications for MT-E791S. Specifications are typical at 25°C unless otherwise noted.



**Caution** Using the MT-E791S in a manner not described in this document may impair the protection the MT-E791S provides.

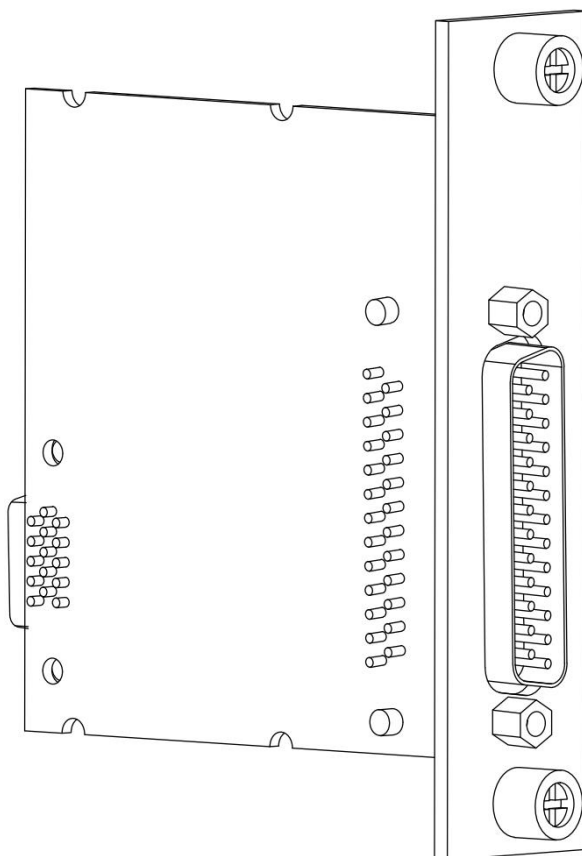


# MT E791S Connectivity

---

Pin definition of DSUB connector and Spring Terminal connector.

DSUB

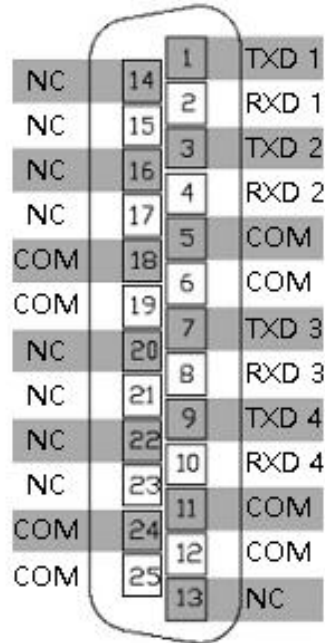

## MT E791S Hardware Overview

---

The MT E791S has four independent RS232 ports that are isolated from the other modules in the system. Each port is fully compatible with the ANSI/EIA/TIA-232 standard.

## MT E791S Specifications

---

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

Maximum baud rate	921.6 kbps
Maximum RS232 Receive signal continuous Voltage	± 8 V
Data line ESD protection	± 15kV (human body model)

## Power Requirements

---

Power consumption from chassis	0.5 W max
Thermal dissipation (at 70 °C)	1.5 W max

# Safety Voltages

Connect only voltages that are within the following limits:

RS232 Receive Signal-to-COM	$\pm 25V$ max, Measurement Category I
RS232 Transmit Signal-to-COM	$\pm 13.2V$ max, Measurement Category I

## Isolation Voltages

### Port-to-earth ground

Continuous	60 VDC, Measurement Category I up to 5,000 m in altitude
Withstand up to 2,000 m	1,000 Vrms, verified by a 5 s dielectric withstand test
Withstand up to 5,000 m	500 Vrms, verified by a 5 s dielectric withstand test

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

## Shock and Vibration

To meet these specifications, you must panel mount the system.

### Operating vibration

Random (IEC 60068-2-64)	5 g <sub>rms</sub> , 10 Hz to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature	-40 °C to 70 °C (IEC 60068-2-1, IEC 60068-2-2)
Storage temperature	-40 °C to 85 °C (IEC 60068-2-1, IEC 60068-2-2)
Ingress protection	IP40
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing Storage
humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing Pollution
Degree	2
Maximum altitude	
For MT-E721 with DSUB	5,000 m

Indoor use only.

# Support

MT-RIO上手指南:

<http://server.mangotree.cn:9000/WebFile/Downloads/上手指南/MT-RIO/>



RIO上手指南

MT-RIO视频教程:

<http://server.mangotree.cn:9000/WebFile/Downloads/视频教程/MT-RIO/>



RIO视频教程

MT-Master上手指南:

<http://server.mangotree.cn:9000/WebFile/Downloads/上手指南/MT-Master/>



Master上手指南

MT-Master视频教程:

<http://server.mangotree.cn:9000/WebFile/Downloads/视频教程/MT-Master/>



Master视频教程

# Dimensions:(mm)

