


## DATASHEET

# MT E795

## 2-Port, High-Speed CAN FD Module

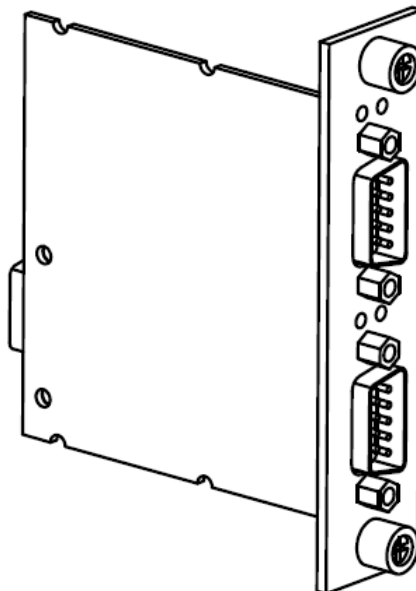


- Two 9-pin male D-Sub connectors
- -40 °C to 70 °C operating;

The MT E795 has two full-featured, independent CAN FD ports that are isolated from each other, and from the other modules in the system. Each port of MT E795 has a CAN FD controller which mixed CAN 2.0B and CAN FD mode. Each port also has a High-Speed CAN FD transceiver that is fully compatible with the ISO/DIS-11898-2:2015 standard and supports baud rates up to 8 Mbps.

# MT E795 Connectivity

---

Pin assignments for CAN0 and CAN1.

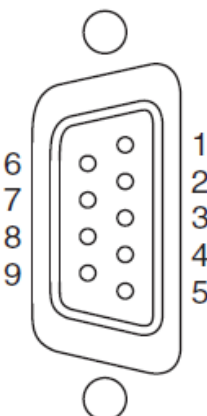Connector	Pin	Signal
	1	NC
	2	CAN_L
	3	COM
	4	NC
	5	SHLD
	6	COM
	7	CAN_H
	8	NC
	9	NC

## MT E795 Hardware Overview

---

The MT E795 has two 9-pin male D-Sub connectors that provide connections to a CAN bus. Each port on the MT E795 has pins for CAN\_H and CAN\_L, to which you connect the CAN bus signals. These signals should be connected using twisted-pair cable.

## MT E795 Specifications

---

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.

Maximum baud rate	8 Mbps
CAN_H, CAN_L bus lines voltage	-27 to +40 VDC

## Power Requirements

Power consumption from chassis	625 mW max
Thermal dissipation (at 70 °C)	1 W max

# Safety Voltages

Connect only voltages that are within the following limits:

Port-to-COM	-27 to +40 VDC max, Measurement Category I
-------------	---

## Isolation Voltages

### Port-to-earth ground

Continuous	60 VDC, Measurement Category I up to 5,000 m in altitude
Withstand up to 2,000 m	1,000 Vrms, verified by a 5 s dielectric withstand test
Withstand up to 5,000 m	500 Vrms, verified by a 5 s dielectric withstand test

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

## Shock and Vibration

To meet these specifications, you must panel mount the system.

### Operating vibration

Random (IEC 60068-2-64)	5 g <sub>rms</sub> , 10 Hz to 500 Hz
Sinusoidal (IEC 60068-2-6)	5 g, 10 Hz to 500 Hz
Operating shock (IEC 60068-2-27)	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

# Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

Operating temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 70 °C
Storage temperature (IEC 60068-2-1, IEC 60068-2-2)	-40 °C to 85 °C
Ingress protection	IP40
Operating humidity (IEC 60068-2-78)	10% RH to 90% RH, noncondensing Storage
humidity (IEC 60068-2-78)	5% RH to 95% RH, noncondensing Pollution
Degree	2
Maximum altitude	5,000 m

Indoor use only.